




APEX DYNAMICS, INC.

**NEW GENERATION
PLANETARY GEARBOX**


AH / AHK Series

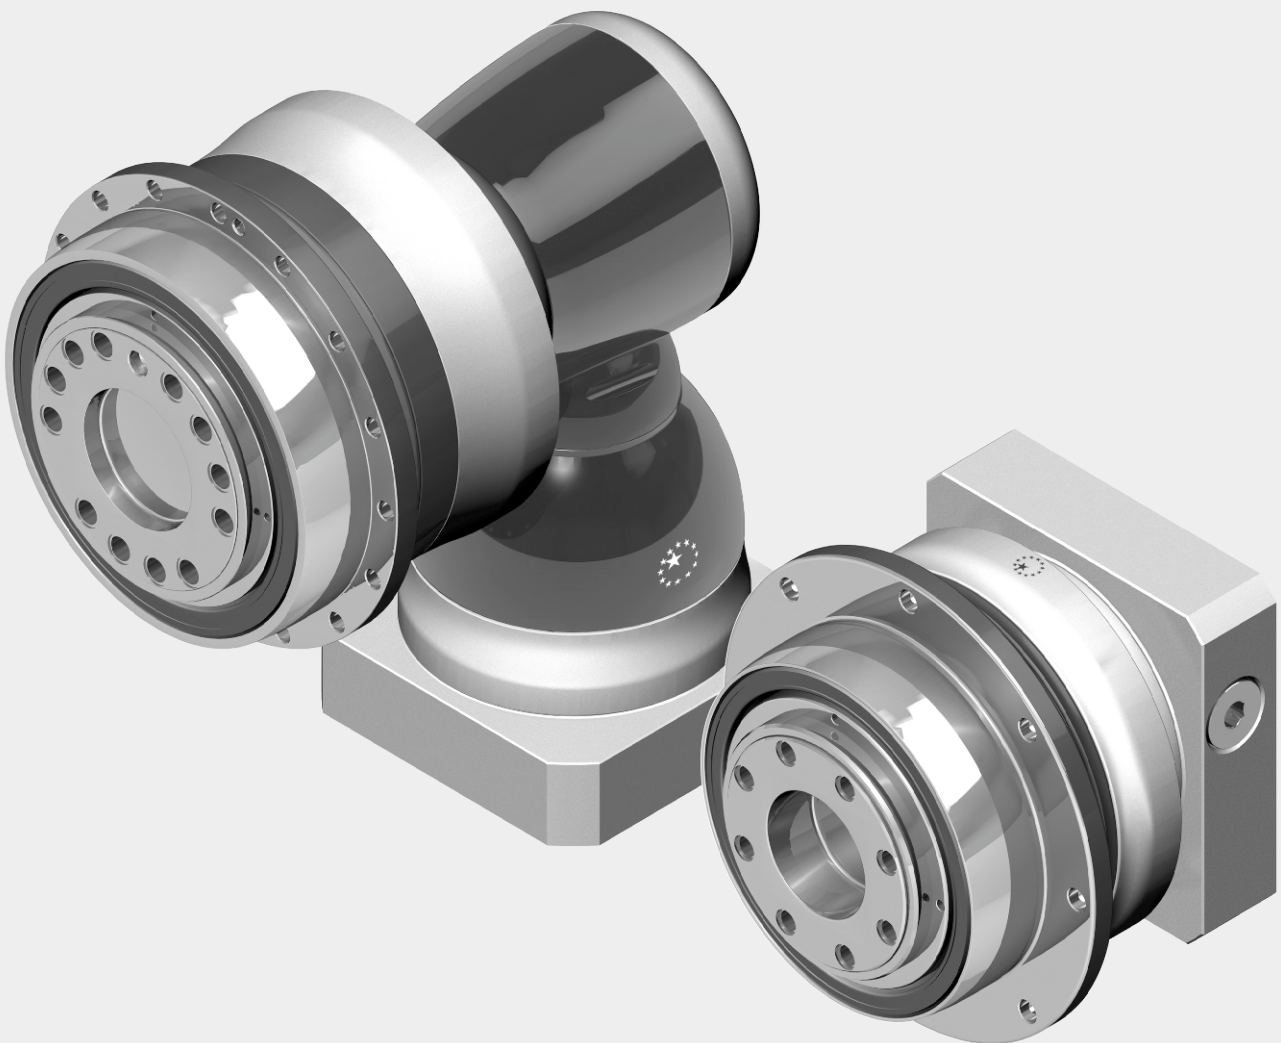

Gearbox Series - AH / AHK

► Features:

- High Torque
- High efficiency
- Long-Term persistence of reduced backlash
- Low noise
- Long service life
- Limited temperature rise
- Optimized output torque
- Optimized Inertia moment
- Flexible mounting diameters

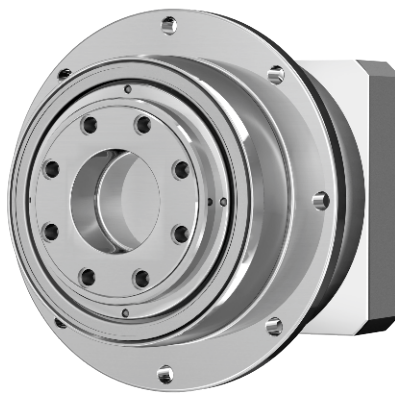

Ordering Code - AH / AHK Gearbox

AH090	—	005 ⁽¹⁾	/	MOTOR
AHS090	—	005 ⁽¹⁾	— SI	
AHK090	—	005 ⁽¹⁾	/	MOTOR
AHKA285 ⁽³⁾				Motor Type
AHKB090 ⁽³⁾				Sfajt Type
				Ratio
				Gearbox Size

AHS is the AH version with input “SHAFT” instead of input “HUB”⁽⁴⁾

Gearbox Size	
AH	064 / 090 / 110 / 140 / 200 / 255 / 285 / 355 / 450
AHK	064 / 090 / 110 / 140 / 200 / 255 / 285 / 355 / 450

Ratio ⁽²⁾	
AH	4 / 5 / 7 / 10 16 / 20 / 21 / 25 / 28 / 31 / 35 / 40 / 46 / 50 / 61 / 70 / 91 / 100
AHK (2 Stg.)	12 / 15 / 16 / 20 / 25 / 28 / 28 / 35 / 40 / 49 / 50 / 70 / 100
AHKA (3 Stg.)	100 / 125 / 140 / 175 / 200 / 250 / 350 / 500 / 700 / 1,000
AHKB (3 Stg.)	48 / 64 / 84 / 100 / 125 / 140 / 175 / 200 / 250 / 280 / 350 / 400 / 500 / 700 / 1,000
AHK (4 Stg.)	1,225 / 1,400 / 1,750 / 2,000 / 2,800 / 3,500 / 5,000 / 7,000 / 10,000
AHKC	4 / 5 / 7 / 8 / 10 / 21 / 31 / 46 / 61 / 91

Shaft Type : SI=Smooth input shaft
S2=Input shaft with key

Motor Type
Manufacturer and Model

(1) Ratio (I=Nin/Nout).
(2) Please refer to the specifications for the ratios provided in each series.
(3) Please refer to page 07.
(4) The customization detail please contact with APEX sales.



Performance - AH Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AH064	AH090	AH110	AH140	AH200	AH255	AH285	AH355	AH450
Nominal Output Torque T_{2N} By n_{1N}	Nm	1	4	100	205	380	765	1,415	2,190	4,035	-	-
			5	85	185	325	660	1,225	1,905	3,505	6,250	12,105
			7	60	135	260	515	980	1,530	2,630	5,045	10,260
			10	24	55	160	315	700	1,070	1,810	3,345	7,160
		2	16	100	205	400	805	1,485	2,295	4,215	-	-
			20	100	205	400	810	1,495	1,990	3,660	-	-
			21	90	195	345	700	1,295	2,005	3,685	6,525	12,495
			25	90	195	345	700	1,295	2,005	3,685	-	-
			28	60	205	405	820	1,510	2,335	4,425	-	-
			31	60	135	280	560	1,050	1,620	2,590	5,280	10,595
			35	75	195	350	705	1,310	2,030	3,725	-	-
			40	40	96	220	615	1,260	2,360	4,430	-	-
			46	24	55	160	335	660	1,005	1,700	3,400	7,125
			50	50	120	275	715	1,325	2,050	3,765	-	-
			61	60	135	300	585	1,095	1,670	2,675	5,445	10,895
			70	60	135	300	585	1,095	1,670	2,675	-	-
			91	24	55	160	345	660	1,005	1,700	3,400	7,000
			100	24	55	160	345	660	1,005	1,700	-	-
Emergency Stop Torque T_{2NOT}	Nm	1,2	4~100	3 times T_{2N}								
Max. Acceleration Torque T_{2B}	Nm	1,2	4~100	1.5 times T_{2N}								
No Load Running Torque ⁽³⁾	Nm	1	4~10	0.45	0.7	1.4	3.5	7	11	14	25	40
		2	16~100	0.2	0.3	0.6	1.3	2.2	3.5	4.5	13	21
Backlash ⁽²⁾	arcmin	1	4~10	≤ 2	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1
		2	16~100	≤ 3	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	1,2	4~100	8	22	60	115	395	650	1,050	2,850	5,700
Nominal Input Speed n_{1N}	rpm	1	4~10	5,000	3,600	3,600	3,000	2,700	2,400	2,100	1,500	1,000
		2	16~100	5,000	4,600	4,600	4,000	3,700	3,400	3,100	2,500	2,000
Max. Input Speed n_{1B}	rpm	1	4~10	7,000	6,000	6,000	5,000	4,500	4,000	3,500	3,000	2,500
		2	16~100	7,000	7,000	7,000	6,000	5,500	5,000	4,500	4,000	3,500
Max. Axial Load F_{2a} ⁽⁴⁾	N	1,2	4~100	1,690	2,220	4,070	8,530	17,000	26,900	39,200	101,500	143,700
Max. Tilting Moment M_{2K} ⁽⁴⁾	Nm	1,2	4~100	120	280	480	1,310	3,530	5,920	9,230	29,100	63,300
Operating Temp	°C	1,2	4~100	-10° C ~ 90° C								
Degree of Gearbox Protection		1,2	4~100	IP67								
Lubrication		1,2	4~100	Synthetic lubrication grease								
Mounting Position		1,2	4~100	All directions								
Running Noise ⁽³⁾	dB(A)	1	4~10	≤ 58	≤ 59	≤ 64	≤ 65	≤ 66	≤ 66	≤ 66	≤ 68	≤ 70
		2	16~100	≤ 58	≤ 59	≤ 60	≤ 63	≤ 66	≤ 66	≤ 66	≤ 68	≤ 70
Efficiency η	%	1	4~10	$\geq 97\%$								
		2	16~100	$\geq 94\%$								

(1) Ratio ($i = N_{in} / N_{out}$).

(2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .

(3) The values are measured by gearbox with ratio 10 (1-stage) or ratio 100 (2-stage), no loading at 3,000 RPM or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.

(4) Applied to the output flange center at 100 rpm.


(5) Continuous operation is not recommended.

Inertia - AH Gearbox

Model No.		AH064		AH090		AH110		AH140		AH200		AH255		AH285		AH355		AH450	
Ø ^(A) (C3)		1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.	1-st.	2-st.
8	kg.cm ²	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
11		0.17	0.16	-	0.17	-	-	-	-	-	-	-	-	-	-	-	-	-	-
14		0.21	0.2	0.53	0.21	-	0.53	-	-	-	-	-	-	-	-	-	-	-	-
19		0.63	-	0.68	0.63	1.83	0.68	-	1.83	-	-	-	-	-	-	-	-	-	-
24		-	-	4.52	-	5.04	4.52	5.63	5.04	-	5.63	-	-	-	-	-	-	-	-
28		-	-	-	-	6.33	-	7.18	6.33	-	7.18	-	-	-	-	-	-	-	-
32		-	-	-	-	8.73	-	10.1	8.73	12.63	10.1	-	12.53	-	-	-	-	-	-
35		-	-	-	-	14.04	-	15.54	14.04	17.75	15.54	20.82	17.76	37.93	20.82	-	-	-	-
38		-	-	-	-	19.05	-	21.32	19.05	23.26	21.32	27.07	23.27	37.93	27.07	-	23.6	-	-
42		-	-	-	-	-	-	23.2	-	25.4	23.2	28.88	25.4	40.13	29	-	25.37	-	30.37
48		-	-	-	-	-	-	56.07	-	61.02	56.07	63.92	60.2	75.75	64.74	-	89.35	-	96.45
55		-	-	-	-	-	-	-	-	88.51	-	92.48	-	-	64.74	122.51	102	188.32	109.06
60		-	-	-	-	-	-	-	-	-	-	-	-	-	-	131.35	-	188.32	117.75

(A) Ø = Input shaft diameter.

Flange Shaft - AH

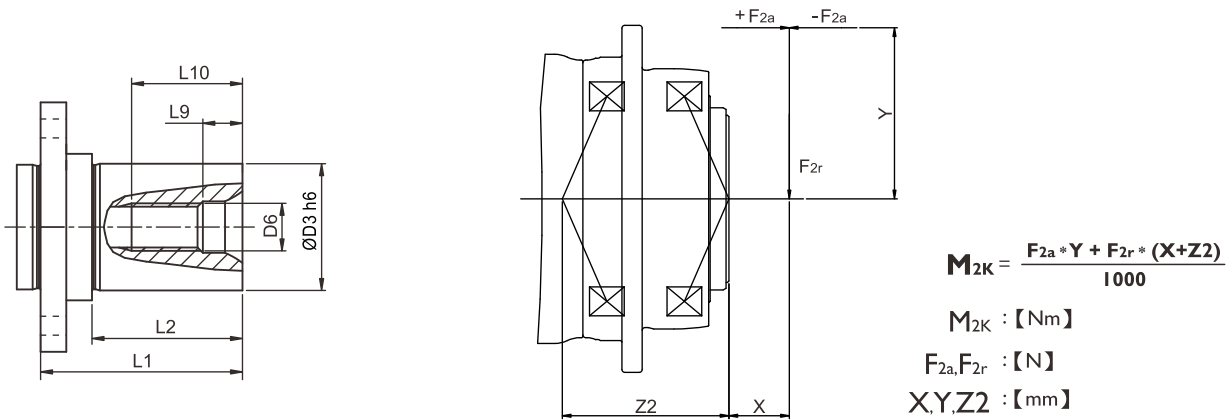

Dimension	L1	L2	D3 h6	D6	L9	L10	Order Code
AH064	33	23	16	M5	4.8	12.5	FLS-AH064-S16
			22	M8	7.2	19	FLS-AH064-S22
AH090	41	30	22	M8	7.2	19	FLS-AH090-S22
			32	M12	10	28	FLS-AH090-S32
AH110	51	38	32	M12	10	28	FLS-AH110-S32
			40	M16	12	36	FLS-AH110-S40
AH140	54	38	40	M16	12	36	FLS-AH140-S40
			55	M20	15	42	FLS-AH140-S55
AH200	73	52	55	M20	15	42	FLS-AH200-S55
			75	M20	15	42	FLS-AH200-S75
AH255	150	123	90	M24	18	50	FLS-AH255-S90



Note: Dimensions are related to gearbox flange interface.

M2K

AH / AHK	064	090	110	140	200	255	285	355	450
Z2 [mm]	63.7	84.5	106.2	90	122.8	133.2	175.5	220.6	275.3

Note : Applied to the output flange center at 100 rpm


Dimension AH Gearbox

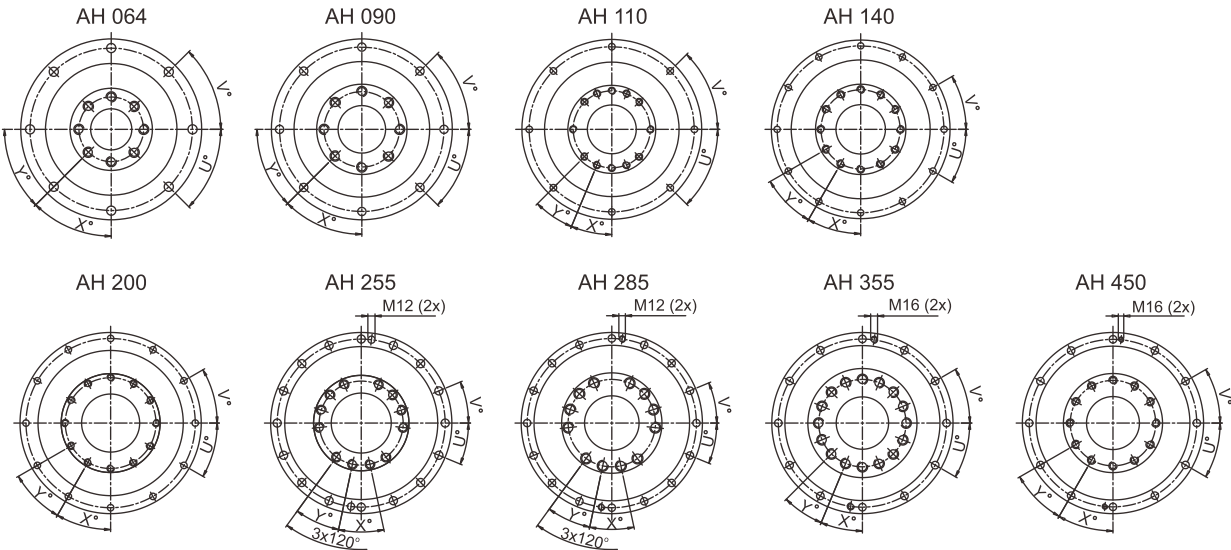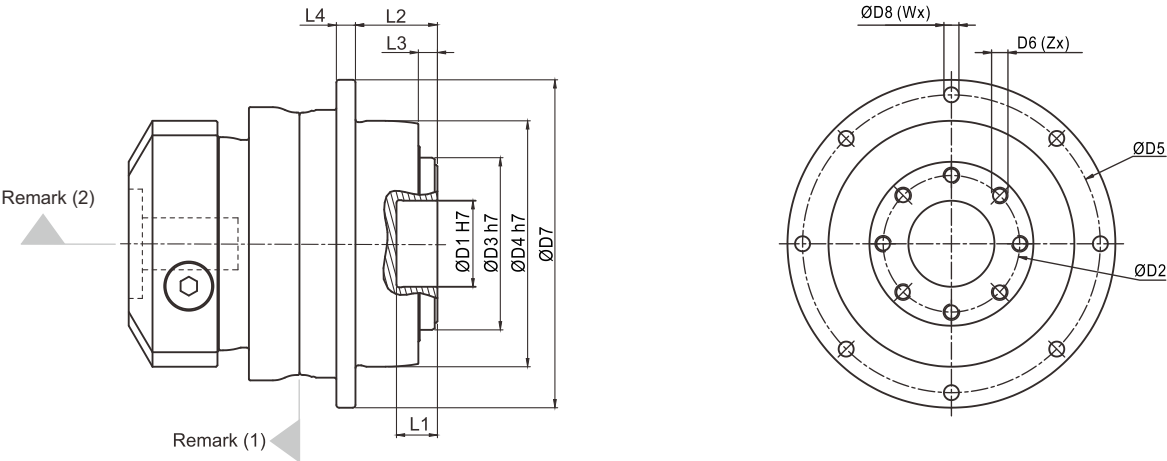

Dimension	AH064	AH090	AH110	AH140	AH200	AH255	AH285	AH355	AH450
D1 H7	20	31.5	40	50	80	100	100	120	155
D2	31.5	50	63	80	125	140	160	200	250
D3 h7	40	63	80	100	160	180	200	250	315
D4 h7	64	90	110	140	200	255	285	355	450
D5	79	109	135	168	233	280	310	385	490
D6 x Pitch x Deep	M5x0.8Px8	M6x1Px10	M6x1Px11	M8x1.25Px15	M10x1.5Px20	M16x2Px25	M20x2.5Px31	M24x3Px32	M30x3.5Px40
D7	88	120	147	180	249.5	302	332	415	530
D8	4.5	5.5	5.5	6.6	9	13.5	13.5	17.5	22
L1	8	15	15	15	16	16	16	35	24
L2	19.5	30	29	38	50	66	75	80	85
L3	4	7	7	7.5	8.5	13.5	16.5	20	20
L4	5	7	8	10	12	18	20	45	60
X in Degree	45	45	22.5	30	30	24	24	22.5	30
Y in Degree	45	45	22.5	30	30	24	24	22.5	30
Z	8	8	12	12	12	12	12	16	12
U in Degree	45	45	45	30	30	22.5	22.5	30	30
V in Degree	45	45	45	30	30	22.5	22.5	30	30
W	8	8	8	12	12	16	16	12	12

(1) Dimensions are related to motor interface. Please contact APEX for details.
(2) As alternative to input "HUB", input "SHAFT" is also available, please find in page 06.

Dimension - AHS (Input Shaft as Option)

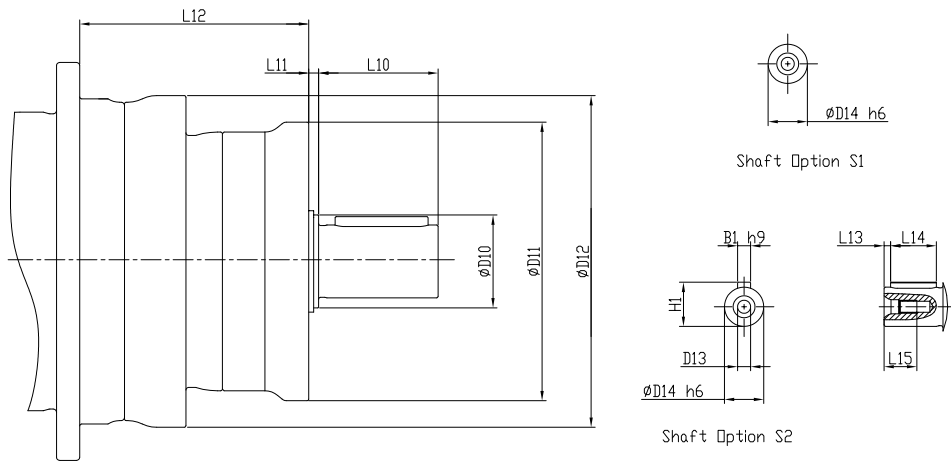

Dimension	Stage	AHS064	AHS090	AHS100	AHS140	AHS255	AHS255	AHS285	AHS450	AHS450
D10	1	20	28	35	50	70	70	75	-	-
	2	17	20	28	35	50	70	70	75	75
D11	1	68	84	93	118	178	180	225	-	-
	2	60	68	84	93	118	178	180	225	225
D12	1,2	76	100	132	160	232	262	301.5	362	466
D13	1	M4x0.7P	M8x1.25P	M10x1.5P	M12x1.75P	M16x2P	M20x2.5P	M20x2.5P	-	-
	2	M3x0.5P	M4x0.7P	M8x1.25P	M10x1.5P	M12x1.75P	M16x2P	M20x2.5P	M202.5P	M20x2.5P
D14 h6	1	12	22	28	38	45	55	60	-	-
	2	10	12	22	28	38	45	55	55	60
L10	1	18	36	42	58	82	82	105	-	-
	2	15	18	36	42	58	82	82	82	105
L11	1	3	3	4	5	10	11	11	-	-
	2	3	3	3	4	5	10	11	11	11
L12	1	57.5	69	88	107.5	151.5	149	216	-	-
	2	73	85	110	136	174.5	210	255.5	278.5	374
L13	1	2	3	5	5	5	6	2.5	-	-
	2	2	2	3	5	5	5	6	6	2.5
L14	1	14	28	32	40	65	70	100	-	-
	2	10	14	28	32	40	65	70	70	100
L15	1	10	19	22	28	36	42	42	-	-
	2	9	10	19	22	28	36	42	42	42
B1 h9	1	4	6	8	10	14	16	18	-	-
	2	3	4	6	8	10	14	16	16	18
H1	1	13.5	24.5	31	41	48.5	59	64	-	-
	2	11.2	13.5	24.5	31	41	48.5	59	59	64


Performance - AHS (Input Shaft as Option)

Model No.		Stage	Ratio ⁽¹⁾	AHS064	AHS090	AHS110	AHS140	AHS200	AHS255	AHS285	AHS355	AHS450
Max. Radial Load F_{rB} ⁽²⁾	N	1	4~10	460	600	800	1,025	2,720	2,940	3,620	-	-
		2	16~100	275	460	600	800	1,025	2,720	2,940	3,240	3,620
Max. Axial Load F_{aB} ⁽²⁾	N	1	4~10	230	300	400	512	1,360	1,470	1,810	-	-
		2	16~100	137	230	300	400	512	1,360	1,470	1,620	1,810
Moment of Inertia	Kg·cm ²	1	4~10	0.19	0.62	1.78	7.72	44.73	55.41	133.12	-	-
		2	16~100	0.06	0.19	0.62	1.78	7.72	44.73	53.41	133.12	111.15

(1) Ratio($i=N_{in} / N_{out}$).
(2) Applied to the input shaft center at 1000 rpm
(3) The customization detail please contact with APEX sales.

AHK Gearbox

AHK Structure

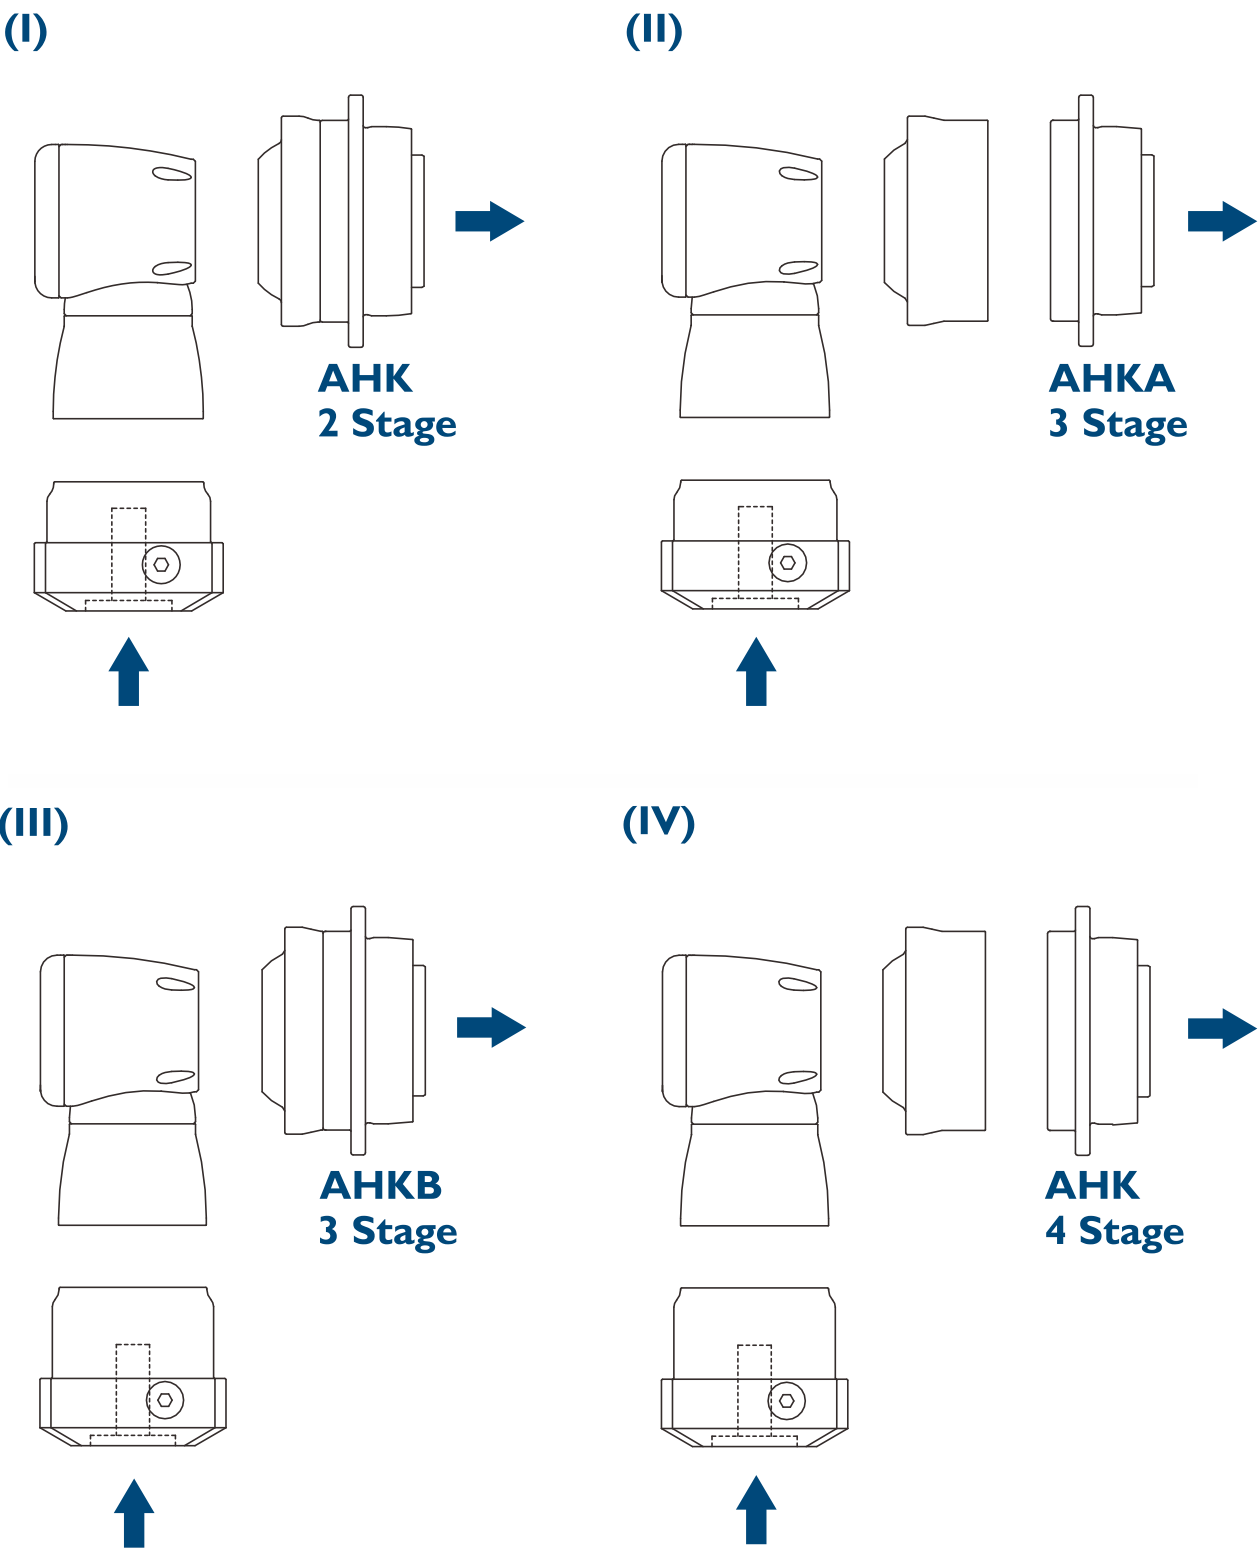

Performance - AHK (2 stage) Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AHK064	AHK090	AHK110	AHK140	AHK200	AHK255	AHK285	AHK355
Nominal Output Torque T _{2N} By n _{IN}	Nm	2	12	100	200	400	805	1,495	1,680	3,280	-
			15	-	-	-	-	-	2,005	3,675	6,510
			16	100	225	405	815	1,510	1,680	3,280	-
			20	100	230	405	820	1,520	1,780	3,710	6,570
			25	95	195	350	710	1,320	1,775	3,735	6,615
			28	92	200	400	800	1,535	1,560	3,000	-
			35	95	200	355	715	1,330	1,950	3,750	6,675
			40	72	160	340	680	1,440	1,440	2,400	-
			49	63	135	290	585	1,105	1,680	2,685	5,470
			50	90	200	360	725	1,345	1,800	3,000	5,500
			70	63	135	295	600	1,130	1,710	2,730	5,560
			100	24	57	160	350	655	1,005	1,685	3,315
Emergency Stop Torque T _{2NOT}	Nm	2	12~100	2 times T _{2N}							
Max. Acceleration Torque T _{2B}	Nm	2	12~100	1.5 times T _{2N}							
No Load Running Torque ⁽³⁾	Nm	2	12~100	1	1.3	2	3.1	6	13	16	20
Backlash ⁽²⁾	arcmin	2	12~100	≤ 3	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	2	12~100	12	27	56	112	389	642	1,275	2,500
Nominal Input Speed n _{IN}	rpm	2	12~100	3,000	3,000	2,800	2,700	2,200	2,100	2,000	1,600
Max. Input Speed n _{IB}	rpm	2	12~100	6,000	6,000	6,000	4,500	4,500	4,000	3,000	2,500
Max. Axial Load F _{2a} ⁽⁴⁾	N	2	12~100	1,690	2,220	4,070	8,530	17,000	26,900	39,200	101,500
Max. Tilting Moment M _{2K} ⁽⁴⁾	Nm	2	12~100	120	280	480	1,310	3,530	5,920	9,230	29,100
Operating Temp	° C	2	12~100	-10° C~ 90° C							
Degree of Gearbox Protection		2	12~100	IP67							
Lubrication		2	12~100	Synthetic lubrication grease							
Mounting Position		2	12~100	All directions							
Running Noise ⁽³⁾	dB(A)	2	12~100	≤ 64	≤ 66	≤ 68	≤ 68	≤ 70	≤ 70	≤ 72	≤ 74
Efficiency η	%	2	12~100	≥ 94%							



- (1) Ratio (i = N_{in} / N_{out}) .
- (2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .
- (3) The values are measured by gearbox with ratio 100 (2-stage), no loading at 3,000 RPM
or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.
- (4) Applied to the output flange center at 100 rpm.
- (5) Continuous operation is not recommended.

Inertia - AHK (2 stage) Gearbox

Model No.		AHK064	AHK090	AHK110	AHK140	AHK200	AHK255	AHK285	AHK355
Input Shaft (C3) Ø ^(A)									
8	kg.cm ²	0.1	-	-	-	-	-	-	-
11		0.17	0.18	-	-	-	-	-	-
14		0.21	0.5	0.52	-	-	-	-	-
19		-	0.65	1.69	1.71	-	-	-	-
24		-	-	4.89	5.05	6.92	-	-	-
28		-	-	-	6.55	6.98	-	-	-
32		-	-	-	9.47	10.18	10.18	-	-
35		-	-	-	14.91	15.21	15.21	15.68	-
38		-	-	-	20.69	20.7	20.7	21.69	23.46
42		-	-	-	-	22.83	22.83	23.59	25.28
48		-	-	-	-	58.45	58.45	59.3	61.61
55		-	-	-	-	-	-	87.34	89.67

(A) Ø = Input shaft diameter.

Dimension AHK (2 stage) Gearbox (Ratio i = 12~100)

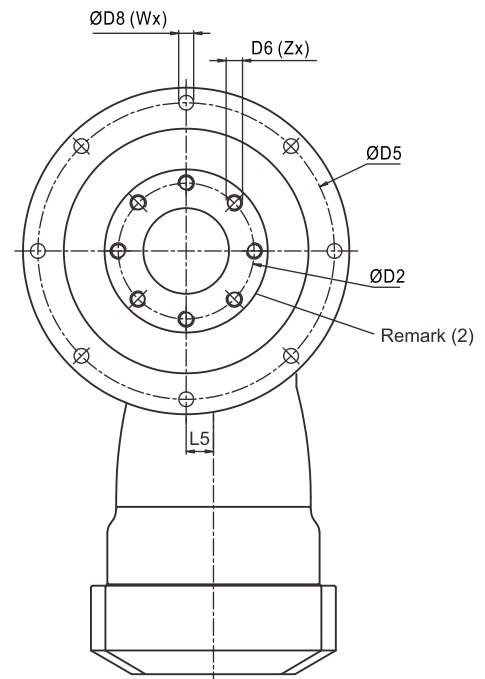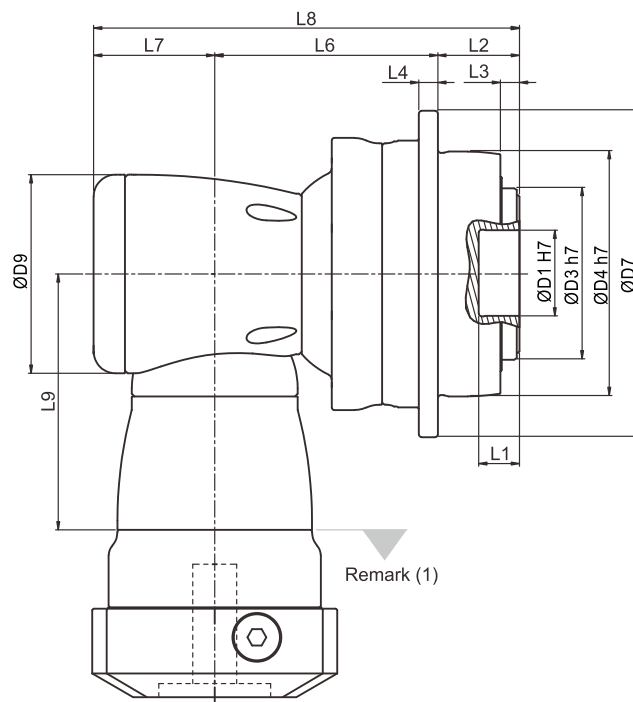

Dimension	AHK064	AHK090	AHK110	AHK140	AHK200	AHK255	AHK285	AHK355
D1 H7	20	31.5	40	50	80	100	100	120
D2	31.5	50	63	80	125	140	160	200
D3 h7	40	63	80	100	160	180	200	250
D4 h7	64	90	110	140	200	255	285	355
D5	79	109	135	168	233	280	310	385
D6 x Pitch x Deep	M5x0.8Px8	M6x1Px10	M6x1Px11	M8x1.25Px15	M10x1.5Px20	M16x2Px25	M20x2.5Px31	M24x3Px32
D7	88	120	147	180	249.5	302	332	415
D8	4.5	5.5	5.5	6.6	9	13.5	13.5	17.5
D9	73	94	116	163	210	210	255	300
L1	8	15	15	15	16	16	16	35
L2	19.5	30	29	38	50	66	75	80
L3	4	7	7	7.5	8.5	13.5	16.5	20
L4	5	7	8	10	12	18	20	45
L5	10	13	17	25	31	31	36	43
L6	87	90.5	114	147.5	175	191.5	249.5	290
L7	44.5	53	68.3	89	115	115	131	165
L8	151	173.5	211.3	274.5	340	372.5	455.5	535
L9	94	114.5	129	173.5	228	228	265.5	294.5
X in Degree	45	45	22.5	30	30	24	24	22.5
Y in Degree	45	45	22.5	30	30	24	24	22.5
Z	8	8	12	12	12	12	12	16
U in Degree	45	45	45	30	30	22.5	22.5	30
V in Degree	45	45	45	30	30	22.5	22.5	30
W	8	8	8	12	12	16	16	12

(1) Dimensions are related to motor interface. Please contact APEX for details.

(2) Refer to the AH series (Page 05) for flange interface.

Performance - AHKA (3 stage) Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AHKA285	AHKA355	AHKA450
Nominal Output Torque T _{2N} By n _{IN}	Nm	3	100	3,875	6,815	12,930
			125	3,900	6,855	12,995
			140	3,910	6,870	13,030
			175	3,930	6,910	13,090
			200	3,945	6,930	12,000
			250	3,970	6,970	13,195
			350	4,000	7,030	13,150
			500	4,035	5,350	9,050
			700	3,090	6,190	11,960
			1,000	1,770	3,400	7,055
Emergency Stop Torque T _{2NOT}	Nm	3	100~1,000	2 times T _{2N}		
Max. Acceleration Torque T _{2B}	Nm	3	100~1,000	1.5 times T _{2N}		
No Load Running Torque ⁽³⁾	Nm	3	100~1,000	6	6	13
Backlash ⁽²⁾	arcmin	3	100~1,000	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	3	100~1,000	1,275	2,500	5,100
Nominal Input Speed n _{IN}	rpm	3	100~1,000	2,100	2,100	2,000
Max. Input Speed n _{IB}	rpm	3	100~1,000	4,000	4,000	3,000
Max. Axial Load F _{2a} ⁽⁴⁾	N	3	100~1,000	39,200	101,500	143,700
Max. Tilting Moment M _{2K} ⁽⁴⁾	Nm	3	100~1,000	9,230	29,100	63,300
Operating Temp	° C	3	100~1,000	-10° C ~ 90° C		
Degree of Gearbox Protection		3	100~1,000	IP67		
Lubrication		3	100~1,000	Synthetic lubrication grease		
Mounting Position		3	100~1,000	All directions		
Running Noise ⁽³⁾	dB(A)	3	100~1,000	≤ 72	≤ 74	≤ 76
Efficiency η	%	3	100~1,000	≥ 92%		


- (1) Ratio (i = N_{in} / N_{out}) .
- (2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .
- (3) The values are measured by gearbox with ratio 1,000 (3-stage), no loading at 3,000 RPM
or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.
- (4) Applied to the output flange center at 100 rpm.
- (5) Continuous operation is not recommended.

Inertia - AHKA (3 stage) Gearbox

Model No.		AHKA285	AHKA355	AHKA450
Input Shaft (C3) Ø ^(A)				
32	kg.cm ²	10.18	10.18	-
35		15.21	15.21	15.68
38		20.7	20.7	21.69
42		22.83	22.83	23.59
48		58.45	58.45	59.3
55		-	-	86.95

(A) Ø = Input shaft diameter.

Dimension **AHKA (3 Stage) Gearbox** (Ratio i = 100~1,000)

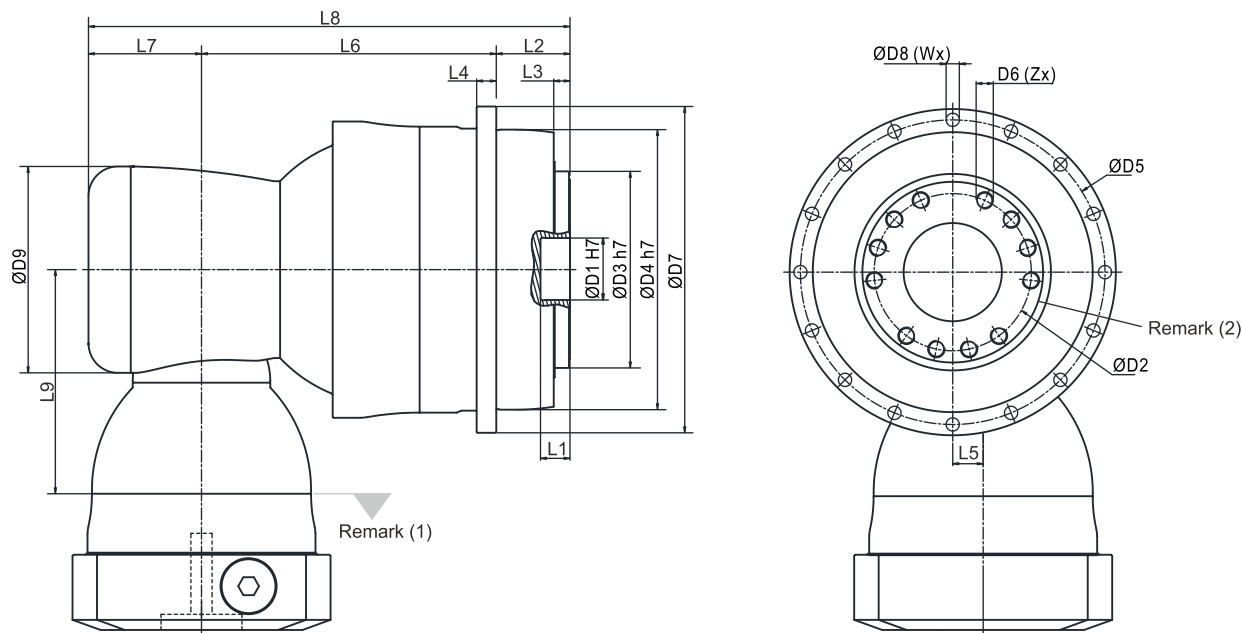

Dimension		AHKA285	AHKA355	AHKA450
D1	H7	100	120	155
D2		160	200	250
D3	h7	200	250	315
D4	h7	285	355	450
D5		310	385	490
D6 x Pitch x Deep		M20x2.5Px31	M24x3Px32	M30x3.5Px40
D7		332	415	530
D8		13.5	17.5	22
D9		210	210	255
L1		16	35	24
L2		75	80	85
L3		16.5	20	20
L4		20	45	60
L5		31	31	36
L6		300	332	447.5
L7		115	115	131
L8		490	527	663.5
L9		228	228	265.5
X in Degree		24	22.5	30
Y in Degree		24	22.5	30
Z		12	16	12
U in Degree		22.5	30	30
V in Degree		22.5	30	30
W		16	12	12

(1) Dimensions are related to motor interface. Please contact APEX for details.
(2) Refer to the AH series(Page 05) for flange interface.

Performance - AHKB (3 stage) Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AHKB090	AHKB110	AHKB140	AHKB200	AHKB255	AHKB285	AHKB355
Nominal Output Torque T _{2N} By n _{IN}	Nm	3	48	-	-	-	-	-	3,280	-
			64	205	415	840	1,545	1,680	3,280	-
			84	200	420	845	1,555	1,680	-	-
			100	205	420	845	1,565	2,085	3,830	6,745
			125	200	365	730	1,355	2,095	3,850	6,785
			140	205	425	845	1,580	2,100	3,860	6,805
			175	205	365	740	1,370	2,115	3,885	6,845
			200	205	430	845	1,590	2,135	3,900	6,865
			250	205	370	745	1,380	2,135	3,920	6,905
			280	200	400	800	1,560	1,780	3,000	-
			350	210	375	755	1,395	1,950	3,750	6,965
			400	160	340	680	1,440	1,440	2,400	-
			500	200	380	760	1,405	1,800	3,000	5,500
			700	135	325	670	1,240	1,875	3,005	6,060
			1,000	55	160	380	660	1,065	1,725	3,325
Emergency Stop Torque T _{2NOT}	Nm	3	64~1,000	2 times T _{2N}						
Max. Acceleration Torque T _{2B}	Nm	3	64~1,000	1.5 times T _{2N}						
No Load Running Torque ⁽³⁾	Nm	3	64~1,000	0.2	0.2	0.3	0.4	I	1.2	1.5
Backlash ⁽²⁾	arcmin	3	64~1,000	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	3	64~1,000	27	56	112	389	642	1,275	2,500
Nominal Input Speed n _{IN}	rpm	3	64~1,000	5,500	4,600	4,600	4,000	3,700	3,400	3,100
Max. Input Speed n _{IB}	rpm	3	64~1,000	7,000	7,000	7,000	6,000	5,500	5,000	4,500
Max. Axial Load F _{2a} ⁽⁴⁾	N	3	64~1,000	2,220	4,070	8,530	17,000	26,900	39,200	101,500
Max. Tilting Moment M _{2K} ⁽⁴⁾	Nm	3	64~1,000	280	480	1,310	3,530	5,920	9,230	29,100
Operating Temp	° C	3	64~1,000	-10° C ~ 90° C						
Degree of Gearbox Protection		3	64~1,000	IP65						
Lubrication		3	64~1,000	Synthetic lubrication grease						
Mounting Position		3	64~1,000	All directions						
Running Noise ⁽³⁾	dB(A)	3	64~1,000	≤ 66	≤ 68	≤ 68	≤ 70	≤ 70	≤ 72	≤ 74
Efficiency η	%	3	64~1,000	≥ 92 %						


- (1) Ratio (i = N_{in} / N_{out}) .
- (2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .
- (3) The values are measured by gearbox with ratio 1,000 (3-stage), no loading at 3,000 RPM
or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.
- (4) Applied to the output flange center at 100 rpm.
- (5) Continuous operation is not recommended.

Inertia - AHKB (3 stage) Gearbox

Model No.		AHKB090	AHKB110	AHKB140	AHKB200	AHKB255	AHKB285	AHKB355
Input Shaft (C3) Ø ^(A)								
8	kg.cm ²	0.17	-	-	-	-	-	-
11		0.17	0.52	-	-	-	-	-
14		0.21	0.53	1.83	-	-	-	-
19		-	0.68	1.83	5.6	-	-	-
24		-	-	5.04	5.63	5.63	-	-
28		-	-	-	7.18	7.18	-	-
32		-	-	-	10.1	10.1	12.63	-
35		-	-	-	15.54	15.54	17.75	17.35
38		-	-	-	21.32	21.32	23.26	23.61
42		-	-	-	-	23.2	25.4	25.5
48		-	-	-	-	56.07	61.02	61.22

(A) Ø = Input shaft diameter.

Dimension **AHKB (3 stage) Gearbox** (Ratio i = 64~1,000)

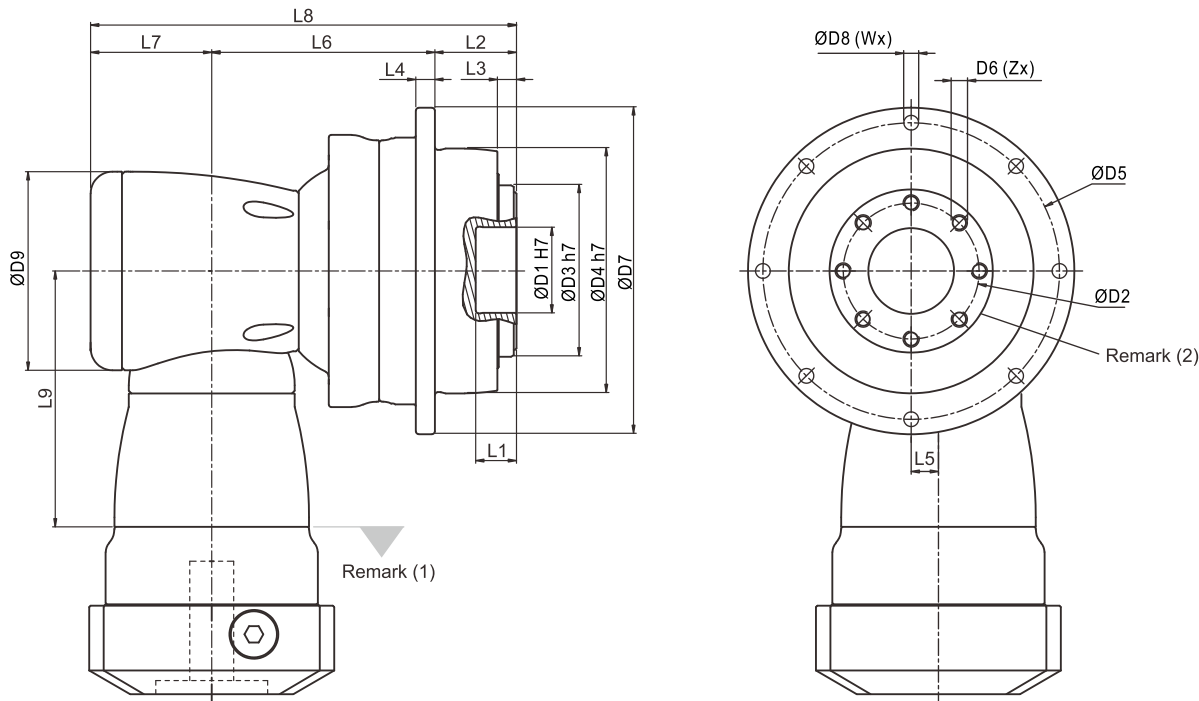

Dimension		AHKB090	AHKB110	AHKB140	AHKB200	AHKB255	AHKB285	AHKB355
D1	H7	31.5	40	50	80	100	100	120
D2		50	63	80	125	140	160	200
D3	h7	63	80	100	160	180	200	250
D4	h7	90	110	140	200	255	285	355
D5		109	135	168	233	280	310	385
D6 x Pitch x Deep		M6x1Px10	M6x1Px11	M8x1.25Px15	M10x1.5Px20	M16x2Px25	M20x2.5Px31	M24x3Px32
D7		120	147	180	249.5	302	332	415
D8		5.5	5.5	6.6	9	13.5	13.5	17.5
D9		94	116	163	210	210	255	300
L1		15	15	15	16	16	16	35
L2		30	29	38	50	66	75	80
L3		7	7	7.5	8.5	13.5	16.5	20
L4		7	8	10	12	18	20	45
L5		13	17	25	31	31	36	43
L6		90.5	114	147.5	175	191.5	249.5	290
L7		53	68.3	89	115	115	131	165
L8		173.5	211.3	274.5	340	372.5	455.5	535
L9		114.5	129	173.5	228	228	265.5	294.5
X in Degree		45	22.5	30	30	24	24	22.5
Y in Degree		45	22.5	30	30	24	24	22.5
Z		8	12	12	12	12	12	16
U in Degree		45	45	30	30	22.5	22.5	30
V in Degree		45	45	30	30	22.5	22.5	30
W		8	8	12	12	16	16	12

(1) Dimensions are related to motor interface. Please contact APEX for details.
(2) Refer to the AH series(Page 05) for flange interface.

Performance - AHK (4 stage) Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AHK285	AHK355	AHK450
Nominal Output Torque T _{2N} By n _{1N}	Nm	4	1,225	4,070	7,145	13,490
			1,400	4,085	7,170	13,535
			1,750	4,100	7,200	13,585
			2,000	4,120	7,200	12,000
			2,800	3,185	6,320	12,145
			3,500	4,180	7,330	13,150
			5,000	4,285	5,350	9,050
			7,000	3,445	6,780	12,670
			10,000	2,240	4,425	9,370
Emergency Stop Torque T _{2NOT}	Nm	4	1,225~10,000 2 times T _{2N}			
Max. Acceleration Torque T _{2B}	Nm	4	1,225~10,000 1.5 times T _{2N}			
No Load Running Torque ⁽³⁾	Nm	4	1,225~10,000	0.4	0.4	I
Backlash ⁽²⁾	arcmin	4	1,225~10,000	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	4	1,225~10,000	1,275	2,500	5,100
Nominal Input Speed n _{1N}	rpm	4	1,225~10,000	3,700	3,700	3,400
Max. Input Speed n _{1B}	rpm	4	1,225~10,000	5,500	5,500	5,000
Max. Axial Load F _{2a} ⁽⁴⁾	N	4	1,225~10,000	39,200	101,500	143,700
Max. Tilting Moment M _{2K} ⁽⁴⁾	Nm	4	1,225~10,000	9,230	29,100	63,300
Operating Temp	° C	4	1,225~10,000	-10° C~ 90° C		
Degree of Gearbox Protection		4	1,225~10,000	IP65		
Lubrication		4	1,225~10,000	Synthetic lubrication grease		
Mounting Position		4	1,225~10,000	All directions		
Running Noise ⁽³⁾	dB(A)	4	1,225~10,000	≤ 72	≤ 74	≤ 76
Efficiency η	%	4	1,225~10,000	≥ 90%		


(1) Ratio (i = N_{in} / N_{out}) .
(2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .
(3) The values are measured by gearbox with ratio 10,000 (4-stage), no loading at 3,000 RPM
or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.
(4) Applied to the output flange center at 100 rpm.
(5) Continuous operation is not recommended.

Inertia - AHK (4 stage) Gearbox

Model No.		AHK285	AHK355	AHK450
Input Shaft (C3) Ø ^(A)				
24	kg.cm ²	5.63	5.63	-
28		7.18	7.18	-
32		10.1	10.1	12.63
35		15.54	15.54	17.75
38		21.32	21.32	23.26

(A) Ø = Input shaft diameter.

Dimension **AHK (4 Stage) Gearbox** (Ratio i = 1,225~10,000)

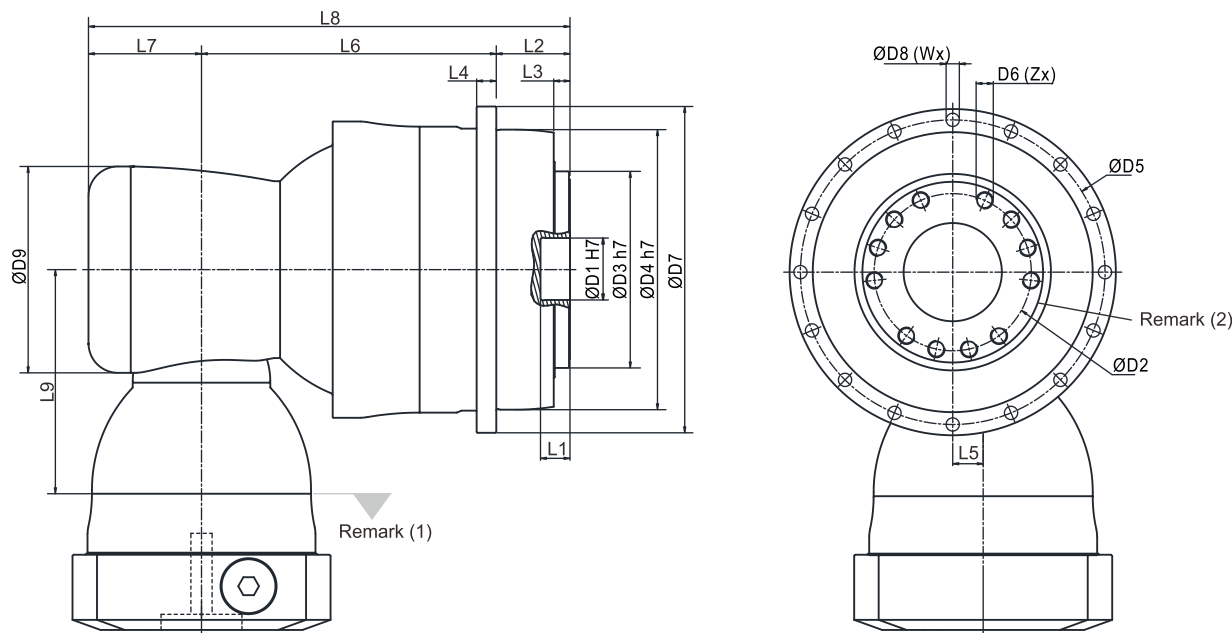

Dimension		AHK285	AHK355	AHK450
D1	H7	100	120	155
D2		160	200	250
D3	h7	200	250	315
D4	h7	285	355	450
D5		310	385	490
D6 x Pitch x Deep		M20x2.5Px31	M24x3Px32	M30x3.5Px40
D7		332	415	530
D8		13.5	17.5	22
D9		210	210	255
L1		16	35	24
L2		75	80	85
L3		16.5	20	20
L4		20	45	60
L5		31	31	36
L6		300	332	447.5
L7		115	115	131
L8		490	527	663.5
L9		228	228	265.5
X in Degree		24	22.5	30
Y in Degree		24	22.5	30
Z		12	16	12
U in Degree		22.5	30	30
V in Degree		22.5	30	30
W		16	12	12

(1) Dimensions are related to motor interface. Please contact APEX for details.
(2) Refer to the AH series(Page 05) for flange interface.

Performance AHKC Gearbox

Model No.		Stage	Ratio ⁽¹⁾	AHKC064	AHKC090	AHKC110	AHKC140	AHKC200	AHKC255	AHKC285	AHKC355	AHKC450
Nominal Output Torque T _{2N} By n _{1N}	Nm	2	4	100	205	380	775	1,440	2,240	4,160	-	-
			5	85	185	330	670	1,250	1,930	3,610	-	-
			7	60	135	260	525	1,000	1,750	2,535	-	-
			8	96	205	395	800	1,320	2,300	4,260	-	-
			10	90	190	340	690	1,290	2,000	3,700	-	-
		3	21	-	195	345	700	1,310	2,100	3,750	6,590	12,630
			31	-	135	275	565	1,070	1,790	2,660	5,720	10,800
			46	-	57	160	340	675	1,080	1,890	3,460	7,800
			61	-	135	285	590	1,115	1,790	2,750	5,720	11,110
91	-	57	160	350	675	985	1,600	3,460	6,430			
Emergency Stop Torque T _{2NOT}	Nm	2,3	4~91	2 times T _{2N}								
Max. Acceleration Torque T _{2B}	Nm	2,3	4~91	1.5 times T _{2N}								
No Load Running Torque ⁽³⁾	Nm	2	4~10	2	2.5	5.8	12	25	48	95	-	-
		3	21~91	1	1.5	2.5	4	9	18.5	35	75	148
Backlash ⁽²⁾	arcmin	2	4~10	≤ 3	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	-	-
		3	21~91	-	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Torsional Rigidity	Nm/arcmin	2,3	4~91	12	27	56	112	389	642	1,275	2,500	5,100
Nominal Input Speed n _{1N}	rpm	2	4~10	5,000	3,600	3,000	2,300	1,800	1,500	1,100	-	-
		3	21~91	-	4,600	4,000	3,000	2,300	1,800	1,500	1,500	1,100
Max. Input Speed n _{1B}	rpm	2	4~10	7,000	6,000	5,500	4,500	3,500	3,000	2,200	-	-
		3	21~91	-	7,000	6,500	5,500	4,500	3,500	3,000	3,000	2,200
Max. Axial Load F _{2a} ⁽⁴⁾	N	2,3	4~91	1,690	2,220	4,070	8,530	17,000	26,900	39,200	101,500	143,700
Max. Tilting Moment M _{2K} ⁽⁴⁾	Nm	2,3	4~91	120	280	480	1,310	3,530	5,920	9,230	29,100	63,300
Operating Temp	° C	2,3	4~91	-10° C ~ 90° C								
Degree of Gearbox Protection		2,3	4~91	IP65								
Lubrication		2,3	4~91	Synthetic lubrication grease								
Mounting Position		2,3	4~91	All directions								
Running Noise ⁽³⁾	dB(A)	2	4~10	≤68	≤ 68	≤ 68	≤ 70	≤ 70	≤ 72	≤ 74	-	-
		3	21~91	-	≤ 68	≤ 68	≤ 70	≤ 70	≤ 72	≤ 74	≤ 74	≤ 76
Efficiency η	%	2	4~10	≥ 95 %								
		3	21~91	≥ 93 %								


- (1) Ratio (i = N_{in} / N_{out}) .
- (2) Backlash is measured at 2% of Nominal Output Torque T_{2N} .
- (3) The values are measured by gearbox with ratio 10 (2-stage) or ratio 91 (3-stage), no loading at 3,000 RPM or at the respective Nominal Input Speed by bigger model size.
By lower ratio and/or higher RPM, the values could be higher.
- (4) Applied to the output flange center at 100 rpm.
- (5) Continuous operation is not recommended.

Inertia AHKC Gearbox (Ratio i=4~10 / 21~91)

Model No.		AHKC064	AHKC090		AHKC110		AHKC140		AHKC200		AHKC255		AHKC285		AHKC355	AHKC450
Ø ^(A) (C3)		2-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	3-st.	3-st.
8	kg.cm ²	0.1	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-
11		0.17	0.52	0.17	-	-	-	-	-	-	-	-	-	-	-	-
14		0.21	0.52	0.21	-	0.52	-	-	-	-	-	-	-	-	-	-
19		0.62	1.69	0.62	1.71	1.69	-	1.71	-	-	-	-	-	-	-	-
24		-	4.89	-	5.05	4.89	6.92	5.05	-	6.92	-	-	-	-	-	-
28		-	-	-	6.55	-	6.98	6.55	-	6.98	-	-	-	-	-	-
32		-	-	-	9.47	-	10.18	9.47	10.18	10.18	-	10.18	-	-	-	-
35		-	-	-	14.91	-	15.21	14.91	15.21	15.21	15.68	15.21	23.46	15.68	-	-
38		-	-	-	20.69	-	20.7	20.69	20.7	20.7	21.69	20.7	23.46	21.69	21.69	-
42		-	-	-	-	-	22.83	-	22.83	22.83	23.59	22.83	25.28	23.59	23.59	25.28
48		-	-	-	-	-	58.45	-	58.45	58.45	59.3	58.45	61.61	59.3	59.3	61.61
55		-	-	-	-	-	-	-	-	-	86.95	-	89.67	-	86.95	89.67
60		-	-	-	-	-	-	-	-	-	-	-	112.49	-	-	112.49

(A) Ø = Input shaft diameter.


Dimension AHKC Gearbox (Ratio i = 4~10 / 21~91)

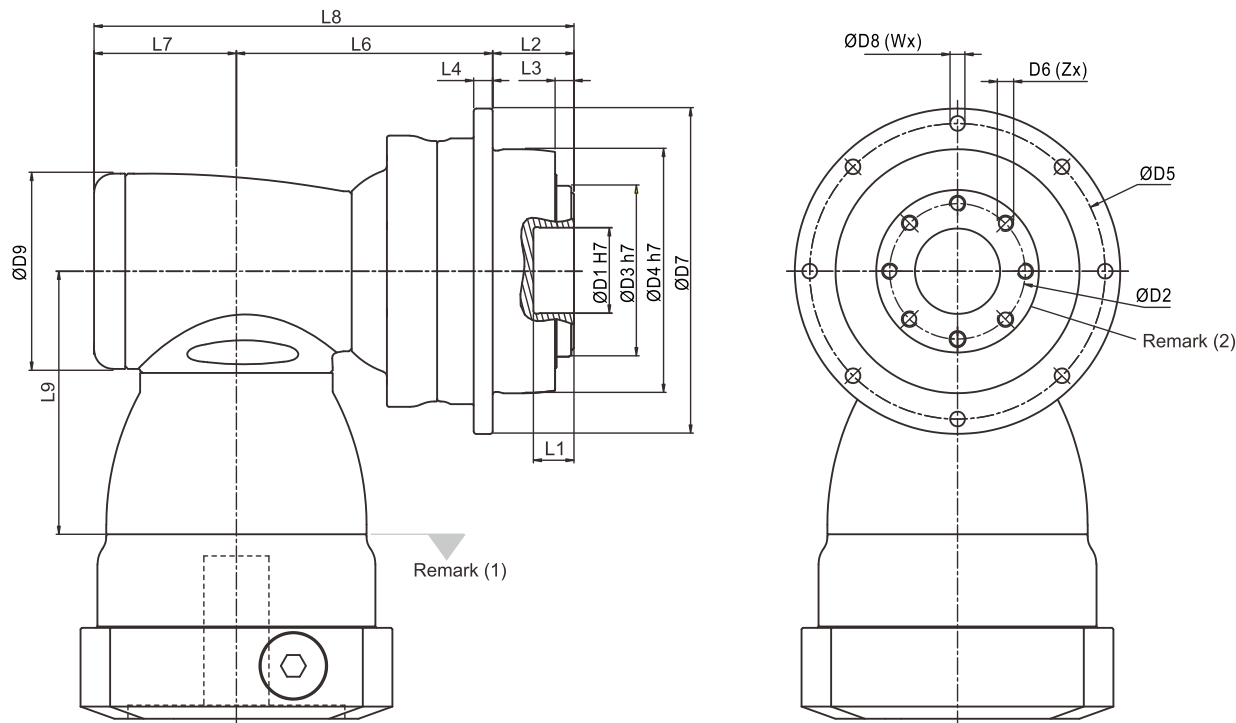

Dimension	AHKC064	AHKC090		AHKC110		AHKC140		AHKC200		AHKC255		AHKC285		AHKC355	AHKC450
	2-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	2-st.	3-st.	3-st.	3-st.
D1 H7	20	31.5		40		50		80		100		100		120	155
D2	31.5	50		63		80		125		140		160		200	250
D3 h7	40	63		80		100		160		180		200		250	315
D4 h7	64	90		110		140		200		255		285		355	450
D5	79	109		135		168		233		280		310		385	490
D6 x Pitch x Deep	M5x0.8Px8	M6x1Px10		M6x1Px11		M8x1.25Px15		M10x1.5Px20		M16x2Px25		M20x2.5Px31		M24x3Px32	M30x3.5Px40
D7	88	120		147		180		249.5		302		332		415	530
D8	4.5	5.5		5.5		6.6		9		13.5		13.5		17.5	22
D9	64	92	64	116	92	156	116	156	156	195	156	240	195	195	240
L1	8	15		15		15		16		16		16		35	24
L2	19.5	30		29		38		50		66		75		80	85
L3	4	7		7		7.5		8.5		13.5		16.5		20	20
L4	5	7		8		10		12		18		20		45	60
L6	92	100.5	121.5	124.5	142	175.5	174.5	185	244.5	199	264.5	265.5	307.5	339.5	463.5
L7	46.5	61.5	46.5	76	61.5	97.5	76	97.5	97.5	105.5	97.5	141	105.5	105.5	141
L8	158	192	198	229.5	232.5	311	288.5	332.5	392	370.5	428	481.5	488	525	689.5
L9	81.5	113.5	81.5	147.5	113.5	196.5	147.5	196.5	196.5	229	196.5	260	229	229	260
X in Degree	45	45		22.5		30		30		24		24		22.5	30
Y in Degree	45	45		22.5		30		30		24		24		22.5	30
Z	8	8		12		12		12		12		12		16	12
U in Degree	45	45		45		30		30		22.5		22.5		30	30
V in Degree	45	45		45		30		30		22.5		22.5		30	30
W	8	8		8		12		12		16		16		12	12

(1) Dimensions are related to motor interface. Please contact APEX for details.
(2) Refer to the AH series(Page 05) for flange interface.

Selection of the optimum gearbox

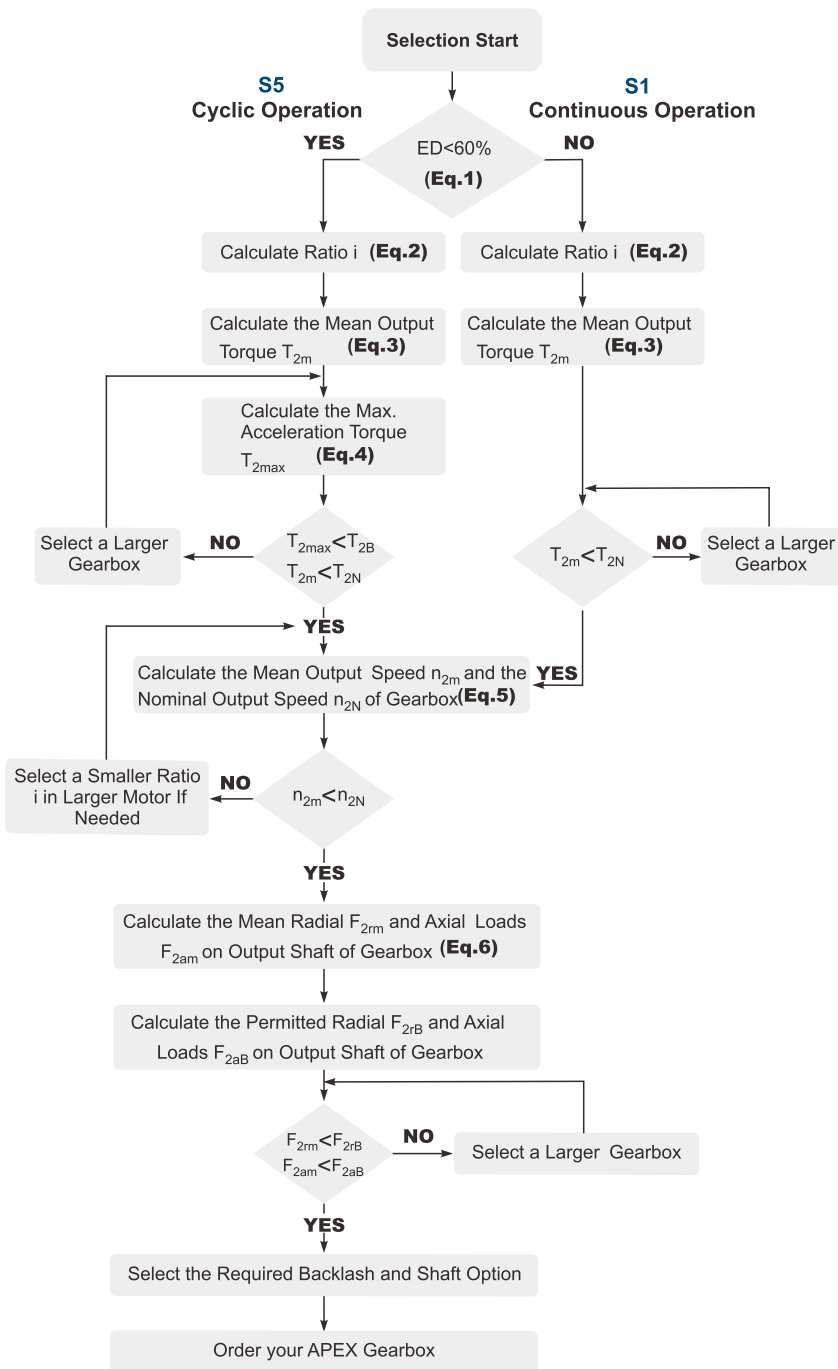

Recommended (for S5 Cycle Operation)

The general design is given for


$$\frac{J_L}{i^2} \leq 4 \times J_m$$

The optimal design is given for

$$\frac{J_L}{i^2} \cong J_m$$

J_L Load Inertia

J_m Motor Inertia

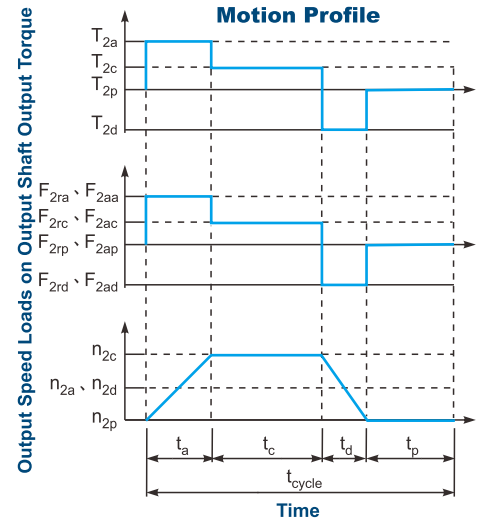

$$1. ED = \frac{t_a + t_c + t_d}{t_{cycle}} \times 100\%$$

Index : a. Acceleration, c. Constant, d. Deceleration, p. Pause

(Eq.1)

$$2. i \cong \frac{n_m}{n_{work}}$$

n_m Output Speed of the Motor

n_{work} Working Speed

(Eq.2)

$$3. T_{2m} = 3 \sqrt{\frac{n_{2a} \times t_a \times T_{2a}^3 + n_{2c} \times t_c \times T_{2c}^3 + n_{2d} \times t_d \times T_{2d}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

(Eq.3)

$$4. T_{2max} = T_{mB} \times i \times K_s \times \eta$$

where K_s is

K_s	No. of Cycles / hr
1.0	0 ~ 1,000
1.1	1,000 ~ 1,500
1.3	1,500 ~ 2,000
1.6	2,000 ~ 3,000
1.8	3,000 ~ 5,000

T_{mB} Max. Output Torque of the Motor

η Efficiency of the Gearbox

(Eq.4)

$$5. n_{2a} = n_{2d} = \frac{1}{2} \times n_{2c}$$

$$n_{2m} = \frac{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}{t_a + t_c + t_d}$$

$$n_{2N} = \frac{n_{1N}}{i}$$




(Eq.5)

$$6. F_{2rm} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2ra}^3 + n_{2c} \times t_c \times F_{2rc}^3 + n_{2d} \times t_d \times F_{2rd}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

$$F_{2am} = 3 \sqrt{\frac{n_{2a} \times t_a \times F_{2aa}^3 + n_{2c} \times t_c \times F_{2ac}^3 + n_{2d} \times t_d \times F_{2ad}^3}{n_{2a} \times t_a + n_{2c} \times t_c + n_{2d} \times t_d}}$$

(Eq.6)

Glossary

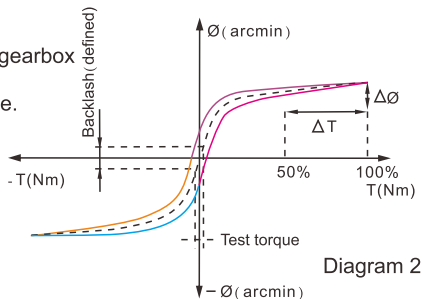Emergency Stop Torque T_{2NOT}	Nm	The Emergency Stop Torque is the maximum permitted torque at the output of gearbox. This may happen only occasionally and may not exceed 1,000 times during the whole service life.
Max. Acceleration Torque T_{2B}	Nm	Under the Cyclic Operation (S5), the Max. Acceleration Torque is the maximum torque which can be transmitted only briefly to the output of gearbox up to 1,000 cycles/hr.
No Load Running Torque	Nm	The No Load Running Torque is the min. torque to overcome the internal friction of a gearbox without loading*.
Nominal Input Speed n_{1N}	rpm	The Nominal Input Speed is the permitted input speed of gearbox by the Continuous Operation (S1) while the housing temperature does not exceed 90°C. This value is measured at environment temperature 25°C.
Max. Input Speed n_{1B}	rpm	The Max. Input Speed is the max. permitted input speed of gearbox by the Cyclic operation (S5). This value is measured at environment temperature 25°C and serves as the absolute limit of the gearbox.
Backlash	arcmin	The Backlash is the maximum angular measurement between two teeth of gears when the transverse operation occurs (refer to Diagram 1). The arcmin is the measurement unit for the backlash. One arcmin equals 1/ 60 degree, symbolized as 1'.  Diagram 1
Torsional Rigidity	Nm/arcmin	Torsional Rigidity is the quotient ($\Delta T / \Delta \theta$) between the applied torque and resulting torsion angle. This value indicates how much torque is needed on the gearbox to rotate the output shaft for 1 arcmin. The Torsional Rigidity can be determined by Hysteresis Curve. Hysteresis Curve When the input shaft is locked, increase torque at the output slowly up to T_{2B} in both directions and then release the torque gradually. According to the measured torque and torsion angle, a closed curve will be acquired as in the Diagram 2.  Diagram 2
Radial Load And Axial Load	N	The permitted radial and axial loads on output shaft of the gearbox depend on the design of the gearbox supporting bearings. For more information, please refer to APEX website.  F_{2r} Radial Load F_{2a} Axial Load
Efficiency η	%	The transmission efficiency of the gears inside a gearbox (without friction).
Operating Temperature	° C	The Operating Temperature indicates the temperature of gearbox housing.
Degree of Protection		IP code stands for International Protection standard. The IP65 as example: the first IP number stands for protection degree against dust; the second IP number stands for protection against liquid.
Lubrication		APEX uses synthetic lubrication grease. Alternate greases are available, please contact APEX.
Running Noise	dB(A)	The Running Noise is measured depends on gearbox size, the ratio and the speed*. Higher speed usually induces higher noise level, while higher ratio induces lower noise level.
Moment of Inertia J_1	kg.cm ²	The Moment of Inertia J_1 is a measurement of the effort applied to an object to maintain its momentary condition at rest or rotating.
Breakaway Torque	Nm	The Breakaway Torque is the minimum torque to start the rotation from the input side of gearbox. A smaller size or a higher ratio gearbox requests less Breakaway Torque.
Back Driving Torque	Nm	The Back Driving Torque is the minimum torque to start the rotation from the output side of gearbox. A larger size or a higher ratio gearbox requires greater Back Driving Torque.

* This value is measured at environment temperature 25°C and the input speed 3,000 rpm. If the Nominal Input Speed n_{1N} of gearbox is lower than 3,000 rpm, this value is measured by that specific Nominal Input Speed.

Liability Disclaimer:

APEX DYNAMICS, INC. endeavors to ensure the accuracy and reliability of the data in catalog.

APEX accepts no liability, whether in any form, for any loss or damage arising from any inaccuracy or omissions of this catalog.

Note



APEX TAIWAN NORTH
ANDEK AUTOMATION CO.,LTD
 TEL +886-02-82262655
 13F-5, NO.2, Jian 8th Rd., Jhonghe Dist., New Taipei City 235, TAIWAN
sales@andtek.com.tw
www.apexdyan.com



APEX TAIWAN CENTRAL
ANDEK AUTOMATION CO.,LTD
 TEL +886-04-23594286
 9F-6, NO.925, Sec.2, Taiwan Blvd., Xitun Dist. Taichung City 407, TAIWAN
sales@andtek.com.tw
www.apexdyan.com



APEX TAIWAN SOUTH
MEN JENN ELECTRIC CO., LTD.
 TEL +886-06-2337332*6
 NO.774, Zhonghua Rd., Yongkang Dist., Tainan City 710, TAIWAN
menjenn@ms24.hinet.net
www.apexdyan.com



APEX TAIWAN INC. SHANGHAI
 TEL +86-21-69220577
 NO.128 ZHUYING Road QINGPU Industry Area, Shanghai, CHINA
sales@apexdyna.cn
www.apexdyan.cn



APEX DYNAMICS SHENZHEN, LTD.
 TEL +86-755-84516325
 NO. 1102A of D area, CFG mansion, Bao Yuan Road, Bao' an District, Shenzhen, CHINA.
sales@szapexdyna.com
www.szapexdyna.com



APEX DYNAMICS BEIJING, LTD.
 TEL +86-10-69570691
 NO. 1, Yao Ping Road, Song Zhuang Town, Tongzhou District, Beijing, CHINA.
bjapexdyna@163.com
www.bjapex.cn



CHONGQING APEX DYNAMICS CO., LTD.
 TEL +86-23-67686860
 406, Building 5, NO. 68, Jinyu Avenue, Beibu New Area, Chongqing, CHINA
sales@cqaexdyna.com
www.apexdyna.com



APEX (XIAMEN) DYNAMICS TECHNOLOGY CO., LTD.
 TEL +86-0592-720-5279
 Unit B-3, 1F., NO. 129, Jingquan Road, Jimei District, Xiamen, Fujian, CHINA
sales@xmapiexdyna.com
www.xmapexdyna.com



APEX DYNAMICS USA, INC.
 TEL +1-631-2449040
 885 Marconi Avenue Ronkonkoma, NY 11779 U.S.A.
sales@apexdynamicsusa.com
www.apexdynamicsusa.com



APEX DYNAMICS KOREA INC
 TEL +82-31-8179992
 7-5, Aenigol-gil, Ilsandong-gu, Goyang-si, Gyeonggi-do, Republic of Korea 10301
sales@apexdynakorea.co.kr
www.apexdynakorea.co.kr



APEX DYNAMICS JAPAN
 TEL +88-092-4511202
 1-3-46, Hamnichibasi, Hakata-ku, Fukuoka, 812-0897, JAPAN
sales@apexdyna.jp
www.apexdyna.jp



APEX DYNAMICS SINGAPORE PTE LTD
 TEL +65-62-66228
 3 South Buona Vista Road, #05-15 & #06-15. SINGAPORE 118136
sales@apexdyna.com.sg
www.apexdyna.com.sg



APEX DYNAMICS (THAILAND) CO., LTD.
 TEL +66-2-326623
 87 Soi Ladkrabang 30, Ladkrabang, Ladkrabang, Bangkok 10520, Thailand
Apexthai2010@gmail.com
www.apexdyna.co.th



APEX DYNAMICS BV
 TEL +31-492-509995
 Churchillaan 101 5705 BK Helmond, NETHERLANDS
sales@apexdyna.nl
www.apexdyna.be



APEX DYNAMICS POLSKA SP. Z O.O.
 TEL +48-12-6304728
 Ul. Krakowska 50, 32-083 Balice, Poland
sales@apexdyna.pl
www.apexdyna.pl



APEX DYNAMICS SPAIN, S.L.
 TEL +34-93-6562990
 Carretera Laureà Miró, 407 08980 - Sant Feliu de Llobregat, Barcelona, SPAIN
apexdyna@apexdyna.es
www.apexdyna.es



Big Diamond Trading Company LLC
 TEL +968-94268885
 2nd floor, Regus, Tamimah building, Al Wattayah, Muscat, Oman
ar.gorji@diamondtradings.com



APEKS DINAMIK REDUKTOR DISLI SAN TIC AS
 TEL +90-232-4589960
 10053 SOKAK NO: 9 A.O.S.B. CIGLI- IZMIR- TURKEY
sales@apexdyna.com.tr
www.apexdyna.com.tr



APEX DYNAMICS AUSTRALIA PTY LTD.
 TEL +613-95-852739
 36 Taunton Drive,Cheltenham, Victoria 3192 AUSTRALIA.
sales@apexdyna.com.au
www.apexdyna.com.au



APEX DYNAMICS (I) JV
 TEL +91-9607927142
 Shop No. 02, S. No. 100/5, Pune-Satara Highway, Ambegaon Khurd, Pune-411046 Maharashtra, India
sales@apexdyna.co.in
www.apexdyna.co.in



APEX DYNAMICS FRANCE SAS
 TEL +33-160-135097
 11 - Burospace - 91570 - Bièvres, France
info@apexdyna.fr
www.apexdyna.fr



APEX DYNAMICS SWEDEN AB
 TEL +46-75-2424444
 Fredrikbergsgatan 2 SE-573 92 Tranås, SWEDEN
sales@apexdyna.se
www.apexdyna.se



PT.APEX DYNAMICS INDONESIA
 TEL +62 21 2928 3681
 Rukan Aralia Blok HY43 no.11, Harapan Indah II, Bekasi - Jawa Barat, INDONESIA 17214
sales@apexdyna.co.id
www.apexdyna.co.id



APEX DYNAMICS GERMANY GMBH
 TEL +49-7171 798069-0
 Marie-Curie-Straße 25 D-73529 Schwäbisch Gmünd
werner.langer@apexdynamics.de
www.apexdynamics.de



APEX DYNAMICS CZECH S.R.O.
 TEL +420-577-663877
 tř. Tomáše Bati 1851 765 02 Otrokovice Česká REPUBLIKA
info@apexdynaczech.cz
www.apexdynaczech.cz



APEX DYNAMICS РОССИЯ
 TEL +7-495-2255452
 17-495-6462422
 г.Москва,ул. Южнопортовая, дом 7, строение "С", 3-й этаж
info@apexdynarussia.ru
www.apexdynarussia.ru



APEX DYNAMICS MIDLANDS LTD
 TEL +44-0121-737-1170
 Heath House, Cheadle Rd, Uttoxeter, ST14 7BY, U K
mikeg@apexdynauk.com
www.apexdynauk.com



APEX DYNAMICS SWITZERLAND AG
 TEL +41-55-4517020
 Obergasse 40, CH-8854 Galgenen, Switzerland
info@apexdyna.ch
www.apexdyna.ch



APEX DYNAMICS MOTION (M) SDN BHD
 TEL +60 7267 4228
 Block A1-2, #35-03, Mercu 1 Jalan Tanjung Puteri 1, R & F Tanjung Puteri, Johor Bahru 80300, Johor.
sales@apexdynam.com.sg
www.apexdyna.com.sg



APEX DYNAMICS BRAZIL
 TEL +55-47-30298700
 Rua Senador Petrônio Portela, 47-Bloco 5, Zona Industrial Norte-CEP 89218-575-Joinville (SC)
lucan@neoyama.com.br
adriano.duarte@neoyama.com.br
www.neoyama.com.br



APEX DYNAMICS ITALY SRL
 TEL +39 02 36634521
 VIA E. DE AMICIS, 2-20091 BRESSO (MI)
info@apexdynamics.it
www.apexdynamics.it



APEX DYNAMICS AUSTRIA GmbH
 TEL +43 720788416
 Dr. Hans-Lechner-Strasse 6, 5071 Wals-Siezenheim
info@apexdynamics.at
www.apexdynamics.at



UAB "APEKSO DINAMIKA"
 TEL +370 52078165
 Medaus g. 28A, Medininku k., Vilniaus r. Sav. LT13192
info@apexdyna.lt
www.apexdyna.lt



APEX DYNAMICS DENMARK
 TEL +45 73121260
 Grundtvigs Allé 165, 6400 Sønderborg, Denmark
sales@apexdyna.dk
www.apexdyna.dk



APEX DYNAMICS ISRAEL
 TEL +972-3-6470471
 17 Hamefalsim St., Kiryat Arye, Petach-Tikva 4951447
Sales@apexdynamics.co.il
www.apexdynamics.co.il



APEX DYNAMICS SLOVAKIA S.R.O.
 TEL +421919400476
 Trenčianska cesta 887/52, 957 01 Bánovce nad Bebravou, Slovak republic
office@apexdyna.sk
www.apexdyna.sk



APEX DYNAMICS, INC.

No10. Keyuan 3rd RD.Situn District, Taichung City 40763, Taiwan (R.O.C)

Tel:886-4-24650219 | Fax:886-4-24650118

sales@apexdyna.com | <http://www.apexdyna.com>

APEX-2024-07-AH/AHK SERIES-1.0-TWN

Printed in Taiwan



APEX DYNAMICS VIETNAM TRADING SERVICES CO., LTD
 TEL +84-028-35350628
 267 Duong so 7, P. Binh Tri Dong B, Q, Binh Tan, Thanh pho Ho Chi Minh,Vietnam
Sales@apexdyna.vn
www.apexdyna.vn

